


ORDERING INFORMATION

SPL-2 02R5

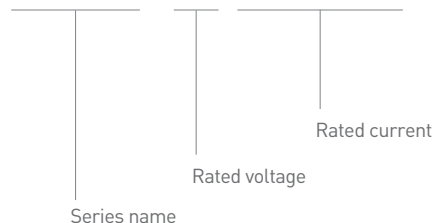

FEATURE

- Small size & light weight
- Low leakage

APPLICATION


- Industrial equipments
- Digital equipments




SPL SERIES SPECIFICATIONS 1Ø

MODEL	RATED VOLTAGE (AC/DC)	RATED CURRENT	LEAKAGE CURRENT (60Hz)	TEMPERATURE RISE	OPERATING TEMPERATURE RANGE	APPROVAL
SPL-2001	250V Max	1A	10mA Max	40°C Max	-25~+85°C	
SPL-201R6	250V Max	1.6A	10mA Max	40°C Max	-25~+85°C	
SPL-202R5	250V Max	2.5A	10mA Max	40°C Max	-25~+85°C	
SPL-203R6	250V Max	3.6A	10mA Max	40°C Max	-25~+85°C	

SPL SERIES SHAPES & DIMENSION / CUIT

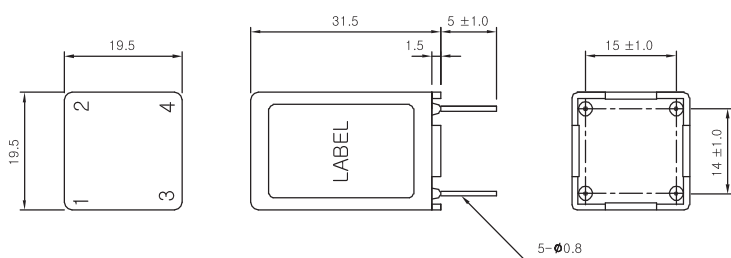

* Tolerance : ±0.5
* Dimensions in mm

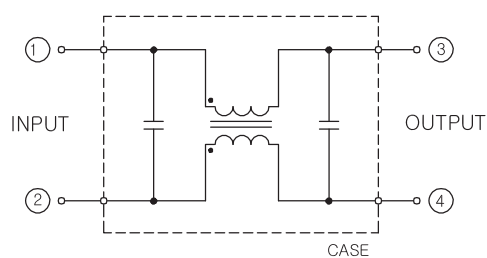

General Information

Switching Mode Power Supply

DC-DC Converter

Noise Filter

Solid State Relay

AC FAN Motor

Power Module

Discrete Semiconductors